

T-Nuts

Accessory for profile systems

SPECIFICATION

Steel
zinc plated, blue passivated

INFORMATION

T-Nuts GN 507 have been specially designed for use on extrusion rails.
They are inserted from either end of the T-Slot.



Rhombus T-Nuts

SPECIFICATION


Heat-treated steel
- Tensile strength class 10
- blackened

INFORMATION

Rhombus T-Nuts GN 508.1 can be inserted vertically into the T-Slot.

TECHNICAL INFORMATION

- Strength values of nuts (see page A20)

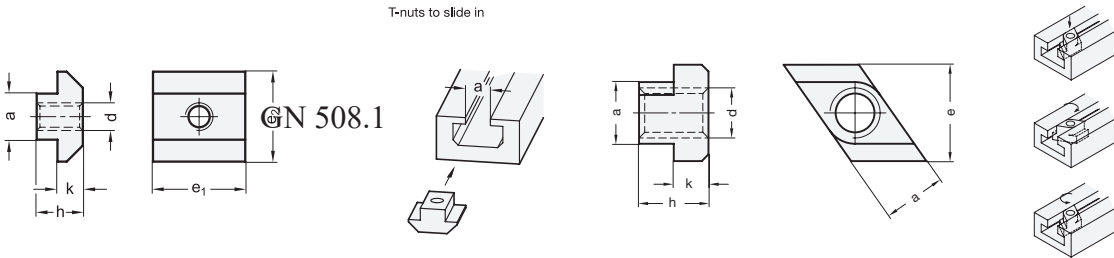

GN 507

Description	a -0.1/-0.3	d	e1	e2	h	k +0.1	Δ
GN 507-8-M4	8	M4	16	16	6	4.2	13
GN 507-8-M5	8	M5	16	16	6	4.2	9
GN 507-8-M6	8	M6	16	16	6	4.2	8
GN 507-8-M8	8	M8	16	16	6	4.2	7
GN 507-10-M4	10	M4	20	19.5	10.5	5.5	19
GN 507-10-M5	10	M5	20	19.5	10.5	5.5	18
GN 507-10-M6	10	M6	20	19.5	10.5	5.5	15
GN 507-10-M8	10	M8	20	19.5	10.5	5.5	13

GN 508.1

Description	a -0.3/-0.5	d	e -0.5	h	k -0.5	T-Slot width DIN 650	Δ
GN 508.1-8-M6	8	M6	13	10	6	8	5
GN 508.1-10-M8	10	M8	15	12	6	10	9
GN 508.1-12-M10	12	M10	18	14	7	12	13
GN 508.1-14-M12	14	M12	22	16	8	14	23
GN 508.1-16-M14	16	M14	25	18	9	16	32
GN 508.1-18-M16	18	M16	28	20	10	18	44
GN 508.1-22-M20	22	M20	35	28	14	22	97