

Cylindrical Revolving handles

Spindle Steel, zinc plated

SPECIFICATION

Steel **ST**

Plastic coated
black, textured finish

Spindle Steel
zinc plated, blue passivated

INFORMATION

Steel revolving handles GN 598 are mainly used on safety handwheels to increase imbalance and thus avoid free wheeling.

Tapered handle

Technopolymer with antimicrobial protection

MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer with silver ions on an inorganic ceramic base, black colour, matte finish.

STANDARD EXECUTION

Zinc-plated steel shank, hexagon socket at threaded end.

FEATURES

The special antimicrobial material, I.644 is made out of, stops any deposit of bacteria, mildew and fungi, offering a sanitized effect on the surface.


Tests carried out on material samples confirmed the stability of the antimicrobial action after several cleaning cycles at high temperatures with soap and solvents.

The great resistance to high temperatures of the antimicrobial additive allows this handle to reach sterilisation temperatures (130°C).

APPLICATIONS


I.644 handle is suitable for applications where hygienic and sanitary elements are required:

- medical and hospital equipment
- disability aids
- machines for food processing and pharmaceutical industry
- equipment for catering service
- urban and public fittings.

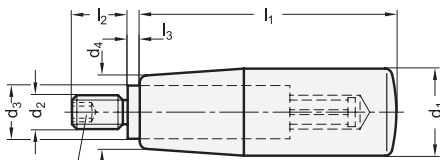

Internal hexagon

ELESA Original design

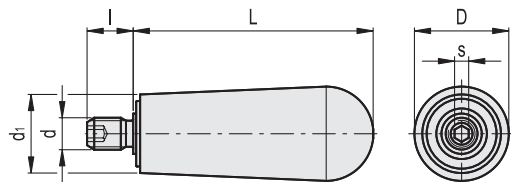

GN 598

Description	d1	d2	d3	d4	l1	l2	l3	
GN 598-ST-18-M6	18	M 6	10	15	40	12	2.5	71
GN 598-ST-21-M6	21	M 6	10	17	50	13	2.5	120
GN 598-ST-21-M8	21	M 8	10	17	50	13	2.5	122
GN 598-ST-23-M8	23	M 8	13	19	65	14	2.5	188
GN 598-ST-23-M10	23	M 10	13	19	65	14	2.5	190
GN 598-ST-26-M8	26	M 8	13	21	80	16	2.5	295
GN 598-ST-26-M10	26	M 10	13	21	80	16	2.5	298
GN 598-ST-28-M10	28	M 10	13	22	90	16	2.5	390
GN 598-ST-31-M12	31	M 12	14	25	102	20	2.5	563

Code	Description	D	L	d	d1	l	s	
122701	I.644/90+x-M8 SAN	36	90	M8	30	16	4	130

