


# GN 430

Guard safety handles

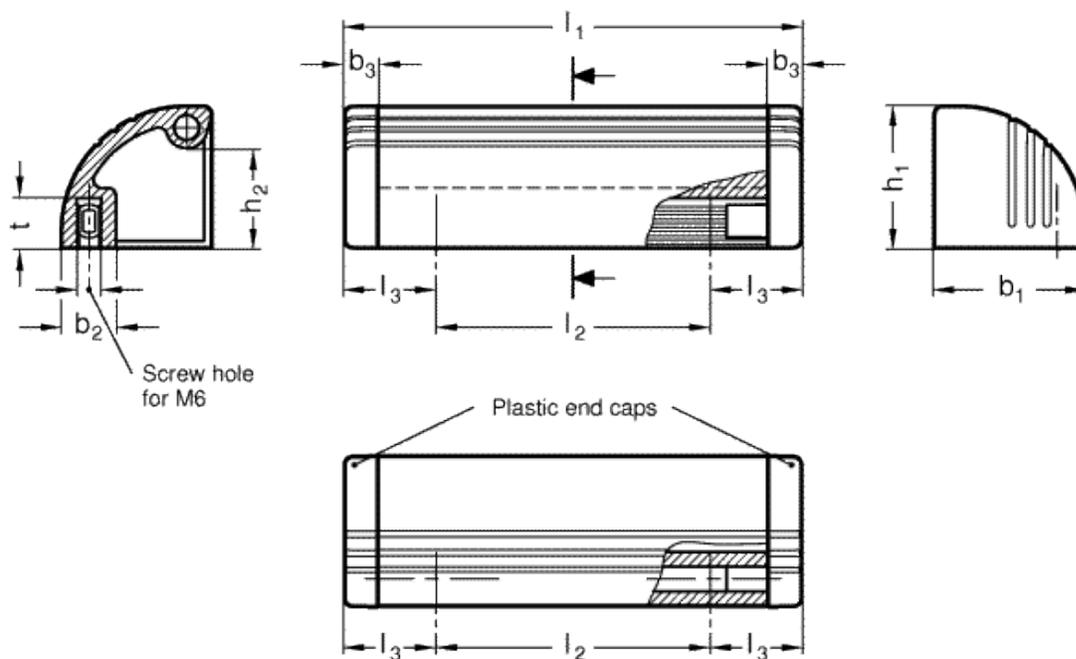

technical informations

## Aluminium tube

- Version SW: RAL 9005 black, matte finish, epoxy resin coating.
- Version EL: anodised, natural colour, matte finish.

## Side end caps

Polyamide based (PA) technopolymer, black grey colour.

*Special executions on request (For sufficient quantities)*

Different lengths.

### Features and applications


Typical applications for guard safety handles GN 430 include swivel or sliding doors on protective doors and equipment. They are also suitable for use as drawer handles.

The screw channel for screw size M6 (extruded aluminium) allows an optional number of fixing screws in any position within the dimension 12. The minimum screw-in depth of 10 mm in the guard safety handle GN 430 must be maintained.

The aluminium profile section is available in any length; the end caps are also available individually.

### Assembly instructions (for every screw coupling)

- Maximum load: 400 N.
- Maximum tightening torque: 4 Nm.
- Minimum screw-in depth: 10 mm.

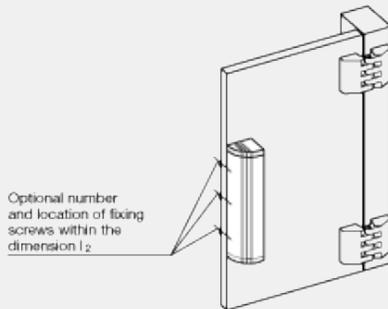

Standard Elements	Main dimensions							Mounting holes		Weight
	Description	$l_1$	$b_1$	$b_3$	$h_1$	$h_2$	$l_2$	$l_3$	$b_2$	
GN 430-110-SW	110	36	8	34	24	66	22	13	12	86
GN 430-110-EL	110	36	8	34	24	66	22	13	12	86
GN 430-130-SW	130	36	8	34	24	86	22	13	12	101
GN 431-130-EL	130	36	8	34	24	86	22	13	12	101
GN 430-150-SW	150	36	8	34	24	106	22	13	12	117
GN 430-150-EL	150	36	8	34	24	106	22	13	12	117
GN 430-200-SW	200	36	8	34	24	156	22	13	12	157
GN 430-200-EL	200	36	8	34	24	156	22	13	12	157
GN 430-250-SW	250	36	8	34	24	206	22	13	12	196
GN 430-250-EL	250	36	8	34	24	206	22	13	12	196
GN 430-300-SW	300	36	8	34	24	256	22	13	12	233
GN 430-300-EL	300	36	8	34	24	256	22	13	12	233
GN 430-400-SW	400	36	8	34	24	356	22	13	12	314
GN 430-400-EL	400	36	8	34	24	356	22	13	12	314
GN 430-500-SW	500	36	8	34	24	456	22	13	12	388
GN 430-500-EL	500	36	8	34	24	456	22	13	12	388



STANDARD MACHINE ELEMENTS WORLDWIDE